



imes-icore®
Dental & Medical Solutions

Best in Class!



CORiTEC® 150i series

The CORiTEC® 150i series

WHAT ARE THE DIFFERENCES?



CORiTEC 150i PRO

CORiTEC 150i dry

Touchscreen	✓	✓
Integrated PC	✓	✓
Premilled Abutments	✓ (CoCr/Ti)	✓ (CoCr)
Wet processing	✓	-
Dry processing	✓	✓
Metal processing (CoCr)	✓	✓
Integrated water tank	✓	-
Ionizer	✓	✓
Auto-calibration	Optional	Optional
Automated cleaning function	✓	✓
Chip tray	-	✓
98mm blank holder	✓	✓
6-fold glass ceramic holder	Optional	Optional
Half-open blank holder "C-Clamp"	Optional	Optional



VERSATILE IN
all cases

Features



Minimum compressed
air requirement



Integrated ionizer



Auto-calibration



Automated
cleaning function



Large number
of holder systems



Metal processing
(CoCr)


WHETHER WET OR DRY
MACHINING, BLOCK OR BLANK
FORM, THE CORITEC 150i SERIES
IMPRESSES IN ALL AREAS.



Each restoration is fabricated with optimum precision and, at the same time, the flexibility opens up an almost free choice of materials and indications. Milling and grinding of zirconium, plastics and metal* is possible, as is the machining of CAD/CAM blocks and Pre-milled abutments. The CORITEC 150i offers an unrivalled variety of applications in a very small space.

*Limited metal processing (CoCr)

UNLIMITED FLEXIBILITY IN MILLING
AND GRINDING – THAT'S THE PROMISE
OF THE CORITEC 150i SERIES

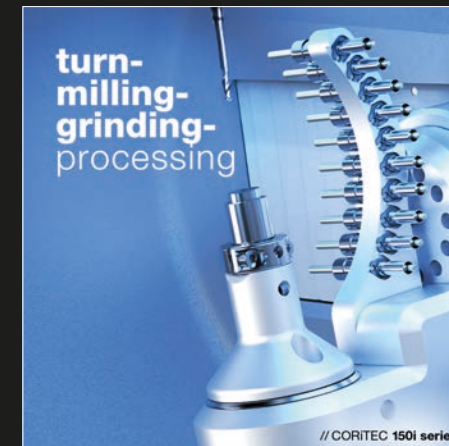

Thanks to a machining angle of up to 360°/130° (A-axis/B-axis), the system is able to effortlessly master even the most demanding tasks. The 10 tool places additionally increase the flexibility of the new CORITEC 150i series.



Features

MORE PERFORMANCE,
MAXIMUM FLEXIBILITY AND
EXTENDED APPLICATION
POSSIBILITIES WITH MINIMAL
SPACE REQUIREMENTS

An exceptional ratio of power, speed and precision – this is what the powerful high-frequency spindle with 860 W and 100.000 rpm offers. Thanks to the quick-clamping system, the various holder systems can be changed quickly and easily – while maintaining the same precision. Time-consuming calibrations are therefore unnecessary.



A VARIETY OF
HOLDING SYSTEMS
OFFERS MAXIMUM
FLEXIBILITY FOR
MAXIMUM CHALLENGES

Also new is the support of the half-open blank holder, the so-called "C-Clamp". Thanks to its open shape, it allows even the most difficult indications to be produced.



CORiTEC® 150i PRO

THE FLEXIBLE MILLING SYSTEM IN CONFINED SPACES

The extremely stable design of the mono-block cast body enables precise machining with round blanks and block forms. The machine's small dimensions and 5-axis simultaneous technology offers a unique ratio of machine size and functionality. Convince yourself of the performance of the CORiTEC 150i for your laboratory!


Available in two versions:



CORiTEC 150i PRO



CORiTEC 150i dry

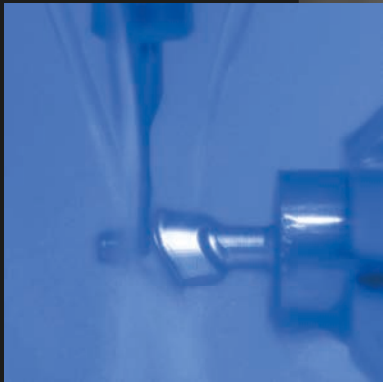

approx. 16.6 inch / 42.2 cm



- WET
- DRY
- 5 AX
- 3 mm
10x
- ION

CORiTEC® 150i PRO

HIGHLIGHTS

- Novel, closed mono-block cast body for highest stability and precision
- No external PC required
- Half-open blank holder "C-Clamp" (optional)
- Ionizer inclusive
- High precision due to integrated temperature compensation
- Wet and dry machining possible
- Minimum external compressed air, only 3 bar required
- Short amortization period
- Minimal footprint
- Auto-calibration (optional)
- Automated cleaning function
- Limited metal processing (CoCr)
- Turning-milling-grinding processing possible

ERGONOMIC
HANDLING
simple graphical
touchscreen operation

HALF-OPEN
BLANK HOLDER
"C-CLAMP"
(OPTIONAL)

WET AND DRY
PROCESSING POSSIBLE



EASY CLEANING
fully coated
enclosed wet cell


POWERFUL PERFORMANCE
high end spindle for milling
and grinding work up to
100.000 rpm

INTEGRATED
WATER TANK
AND FILTRATION

INTEGRATED
TEMPERATURE COMPENSATION

PMMA	WAX	Standard	PreMilled Abutment	Dentures	Crown, Bridge	Inlay, Onlay Veneer	Hybrid Abutment	Splint
Zr	COMPOSITE							
PEEK	PreFab Abutments	C-Clamp	Block	Manual clamping system	Full Denture	Model	Drilling template	Model casting
Glass-ceramics	Ti							
CoCr					Bridge	Telescopic technology	Abutment	Hybrid machining

T11 - 2.5 | 3.0 mm
radius milling tool (single blade, slide coated)




Art.-No. 530004 2503

T5/T10/T17 - 1.5 | 3.0 mm
shaft milling tool (l = 15 mm), universal




Art.-No. 530001 1503

T4/T9 - 1.0 | 3.0 mm
radius milling tool (l = 9 mm)




Art.-No. 530029 1003

T3/T8 - 1.5 | 3.0 mm
radius milling tool (l = 12 mm)




Art.-No. 530029 1503

T2/T7 - 2.0 | 3.0 mm
radius milling tool (l = 12 mm)




Art.-No. 530029 3003

T1/T6 - 3.0 | 3.0 mm
radius milling tool (l = 15 mm)



Art.-No. 530029 3003

T15/T42/T52 - 0.6 | 3.0 mm
radius milling tool (conical)




Art.-No. 526016 0603

T14/T41/T51 - 1.0 | 3.0 mm
radius milling tool (diamond coated)



Art.-No. 530013 1003

T13/T40/T50 - 2.5 | 3.0 mm
radius milling tool (diamond coated)



Art.-No. 530013 2503

T12/T14 - 1.0 | 3.0 mm
radius milling tool



Art.-No. 530016 1003

T12 - 1.0 | 3.0 mm
radius milling tool (single blade, slide coated)




Art.-No. 530004 1003

T11/T13 - 2.5 | 3.0 mm
radius milling tool




Art.-No. 530016 2503

T23 - 0.6 | 3.0 mm
radius grinding tool (conical, diamond)



Art.-No. 530005 0603

T22 - 1.0 | 3.0 mm
radius grinding tool (diamond)




Art.-No. 530005 1003

T21 - 2.5 | 3.0 mm
radius grinding tool (diamond)




Art.-No. 530005 2503

T20 - 0.6 | 3.0 mm
radius milling tool (conical)




Art.-No. 530003 0603

T19 - 0.5 | 3.0 mm
shaft milling tool (l = 4 mm), universal




Art.-No. 530001 0503

T16 - 1.5 | 3.0 mm
radius milling tool (l = 15 mm)




Art.-No. 530016 1503

T98 - 2.5 | 3.0 mm
shaft milling tool (l = 20 mm, three blades)



Art.-No. 530024 2503

T59 - 0.6 | 3.0 mm
highspeed, 15mm



Art.-No. 530031 2003

T33/T43/T53 - 0.3 | 3.0 mm
radius milling tool (conical)



Art.-No. 530016 0303

T32 - 0.6 | 3.0 mm
radius milling tool long (l = 12 mm)




Art.-No. 530012 0603

T31 - 3.0 | 3.0 mm
shaft milling tool (single blade, slide coated)



Art.-No. 530012 3003

T24 - 1.5 | 3.0 mm
radius grinding tool (diamond)



Art.-No. 530005 1503

Materials

priti® MULTIDISC (ZIRCONIUM DIOXIDE)

High-end zirconia for highest mechanical and aesthetic demands.
Indications up to 16-unit bridges, max. 3-unit bridges only with High Translucent.

Wide range of colors and heights available.

	Translucence	Strength
Multi Translucent	49-40 %	80 - 1150 MPa
High Translucent	49 %	> 650 MPa
Extra Translucent	45 %	> 1150 MPa
Translucent	40 %	> 1150 MPa
Opaque	35 %	> 1150 MPa



CORITEC NEM (NON-PRECIOUS METALS)

Burn-on non-precious metal dental milling alloys for the fabrication of e.g. up to 16-unit bridges, implant-supported superstructures etc.

CORITEC NEM is characterized by excellent mechanical properties and good machinability.



CoCr M6 disc

molybdenum containing
type 4 alloy (EN ISO 22674)



CoCr W8 disc

tungsten containing
type 4 alloy (EN ISO 22674)

CORITEC SPLINT COMFORT POLYMERS

Extremely comfortable and biocompatible material for the fabrication of therapeutic splints such as occlusal or stabilization splints. For maximum comfort it becomes more flexible at mouth temperature.

Available in 16 mm and 20 mm.



CORITEC SPLINT BASIC POLYMERS

Crystal clear material for the fabrication of therapeutic splints and drilling templates. Good machinability.


Available in 16 mm and 20 mm.



CORITEC TEMP PMMA DISC

An excellent material to work with that is suitable for long-term temporaries with up to three years of wear and that also contains intrinsic color gradients.

Available in 8 vita shades in 16 mm and 20 mm.



CORITEC GUM PMMA DISC

For gingiva replacement, available in 25 mm.



CORiTEC® SmartControl™

SMART CONTROL OF MACHINE SOFTWARE


SmartControl™: one touch ahead!

The newly developed control software SmartControl™ enables absolutely intuitive operation of our milling machines. From selecting the job to milling or querying the machine status; the self-explanatory and optimized handling makes it possible to start operating the machine in the shortest possible time. Starting a milling process requires only two clicks – you benefit from the smart time savings for your workflow!


FEATURES

- Modern design and simple touch operation
- Intelligent selection of milling jobs
- Easy tool and material loading
- Auto-calibration of the machine
- Wizard guided cleaning and maintenance
- Connection to the Dental Smart Market (DSM)
- Multilingual program interface
- Automatic update function


Optimized for touchscreen operation

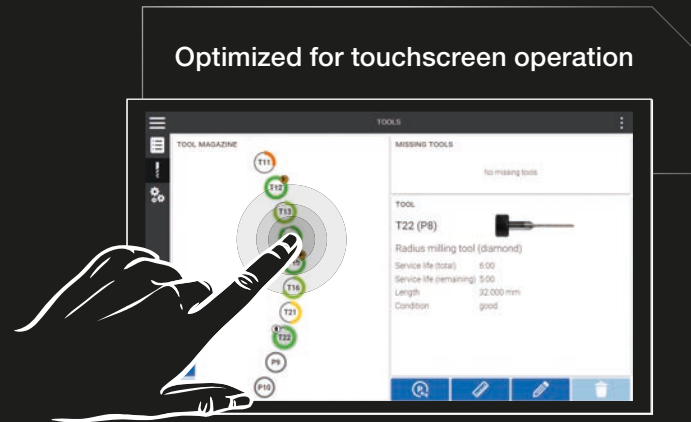

Automated transfer of information from the CAM software

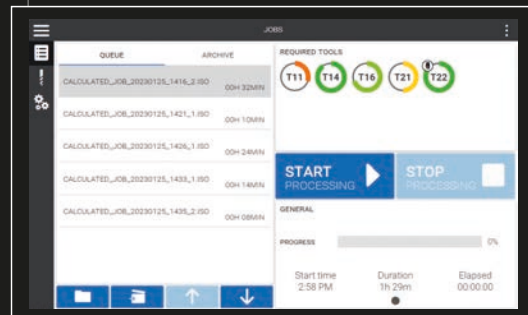

Ideal tool management

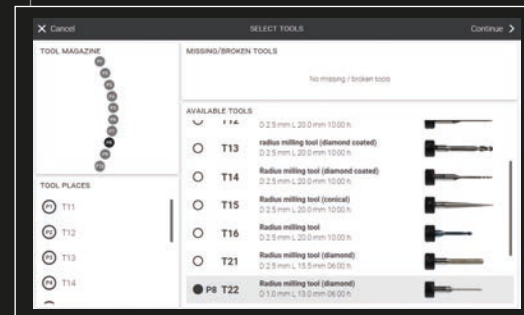


CAM software

CORiTEC iCAMHD

- hyperDENT based CAM software
- Integrated and perfectly matched CAM templates
- Flexible payment model (purchase or subscription model)

CORiTEC iCAM V5 Smart

- All strategies optimized for 5-axis simultaneous machining
- Automatic exchange of implant connections (ReFit option)
- No annual license fees
- Fully automatic and easy operation with “Wizard Workflow”

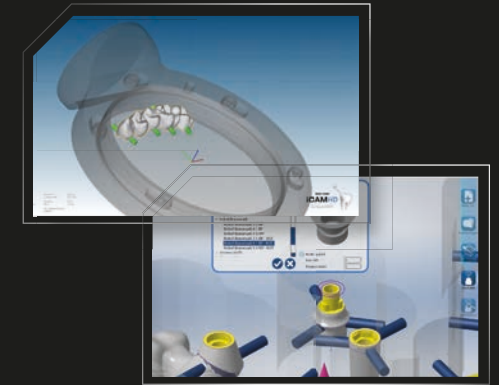

Scanner COMPATIBLE WITH

CORiTEC i3Dscan color

- Automatic object guidance into the measuring field
- Modern touch-operation design
- The 180° opening offers a large working area

CORiTEC i3Dscan color HR


- Enormously high scanning efficiency and precision (4 µm)
- Color texture scan
- Blue-Light LED & high resolution camera (2.8 MP)
- All modules included in the scope of delivery



Auto-calibration

FAST, PRECISE, COST-EFFICIENT

Auto-calibration allows a quick and easy handling to ensure lasting precision without compromise.

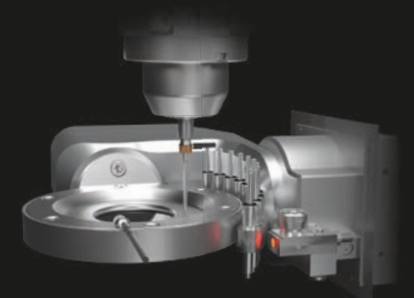

Best in Class!

LATEST UPGRADES AND NEW FEATURES **CORiTEC 150i PRO**

- ✓ **Metal processing** of CoCr blanks
- ✓ **Integrated webcam** for online monitoring
- ✓ **iCAM HD included** with perfect fitting templates

METAL PROCESSING OF CoCr BLANKS

- High surface quality
- High tool lifetime
- Very acceptable milling times

INTEGRATED HD CAMERA

- Online monitoring of milling area and tool changer
- Perfect for end user and dealer remote support
- Live view + recording of the last milling job (in development)

iCAM HD INCLUDED (BASED ON hyperDENT)

- Ideally tuned & optimized templates/strategies
- No costs within the first 12 months
- After 12 months: 980 € per year incl. usage, updates and support (subscription model –no purchase costs for software)



Applications & holders

HALF-OPEN BLANK HOLDER (C-CLAMP)

- Enables 5-axis machining up to 90 degrees axis adjustment
- Extension of the technical possibilities of your milling machine



UNIVERSAL HOLDER FOR TURN-MILL-GRINDING PROCESSING

- High precision
- Improved surface quality
- Tool-saving machining



PREFABRICATED ABUTMENTS

- Short production times
- Production of abutments in very simple processes
- High accuracy of fit due to prefabricated implant interface


DESS
Abutmentholder




NT-Preform® Abutment
(nt-trading)



PreFace® Abutment
(Medentika)



MED-Preform® Abutment
(medentis)



CORiTEC preMilled
Abutment



THERAPEUTIC SPLINTS

- Bite splints, bleaching splints
- Snoring splints, aligners
- Simple and high-quality implementation in CAD/CAM processes



GRINDING OF CAD/CAM BLOCKS

- New 6-fold adapter enables effective production
- Exchangeable strips for different adapter systems
- Crowns, onlays, inlays, veneers, bridge frameworks etc.



MILLING OF MODEL CASTS

- Production in burnout materials (PEEK)
- Allergy-free and lightweight model casting when using PEEK
- Cost-efficient



Sintering furnaces


iSINT eco

The **iSINT eco** offers high-quality technology as well as suitable accessories for high demands at a fair price. Compact and with a small footprint, the **iSINT eco** sintering oven still has sufficient capacity for a sintering bowl Ø100 mm for approx. 25 units. The door stop can be mounted at the right or left side.



iSINT PRO

A larger sintering capacity of up to 80 single crowns is offered by the new **iSINT PRO**. With a heating system of four high-quality molybdenum disilicide (MoSi2) heating elements, you can choose between conventional long-term sintering or SPEED sintering at a rate of up to 99 °C/min/210.20 °F/min. The **iSINT PRO** is operated with a simple and convenient program control. The programs are indicated on a 4-line LCD display. A timer function for overnight sintering or the use of pre-drying programs for shaded zirconium restorations offer further options. In addition, three service programs are available for easy maintenance of the sinter furnace.

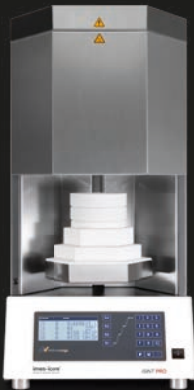

	iSINT eco	iSINT PRO
Number of heating elements	4	4
Display	7-segment	4-line LCD
Number of program memories	9	30
Combustion chamber capacity	1 x 100	2 x 120
Max. heating rate	30 °C/min / 86 °F/min	99 °C/min / 210.20 °F/min
Power in W	1300	3200
Lift function	No	Yes
Speedsintering	No	Yes

Suction system

iVAC silent & iVAC silent PRO

The system is equipped with a teflon filter cartridge, automatic filter cleaning and a dust drawer. With the suction power of 160m³/h the iVAC silent is perfectly suited for your CORTEC 150i and is even stowable in the optional machine table.

	iVAC silent	iVAC silent PRO
Airflow	160 m³/hr	240 m³/hr
Power	490 W	1610 W
Filter system	Teflon filter cartridge, automatic cleaning feature	Teflon filter cartridge, automatic cleaning feature
Filter volume	8 liters/30.28 gpm (dust drawer)	8 liters/30.28 gpm (dust drawer)
Width x depth x height	9.6 x 19.6 x 17.3 inch / 245 x 500 x 440 mm	10.6 x 21.2 x 21.1 inch / 270 x 540 x 535 mm
Supply voltage	230 V	115 V/230 V
Special features	Suitable for machine tables T0, T1 and T2, quiet running, very compact, self-cleaning by vibration	Suitable for machine tables T1 and T2, quiet running, very compact, self-cleaning by vibration



Machine table


MACHINE TABLE T0

The machine table T0 is exactly adapted to the CORTEC 150i series by its dimensions 422 x 540 x 900 mm/16.6 x 21.3 x 35.4 inch (W x D x H).




Dimensions

CORiTEC® 150i series

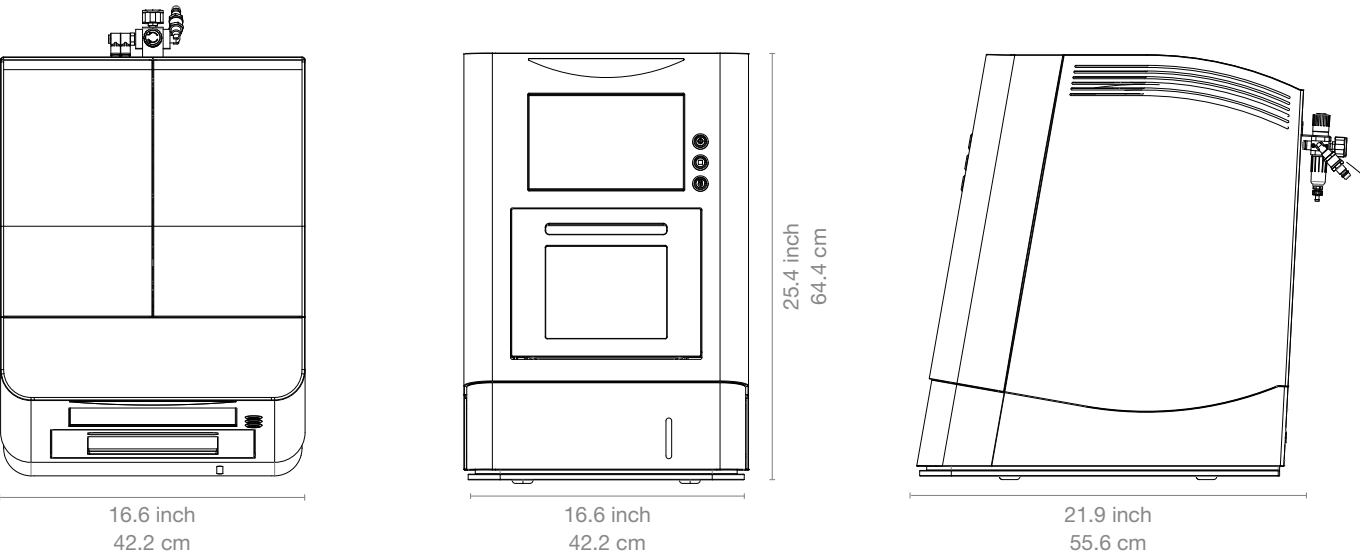

Machine table T0

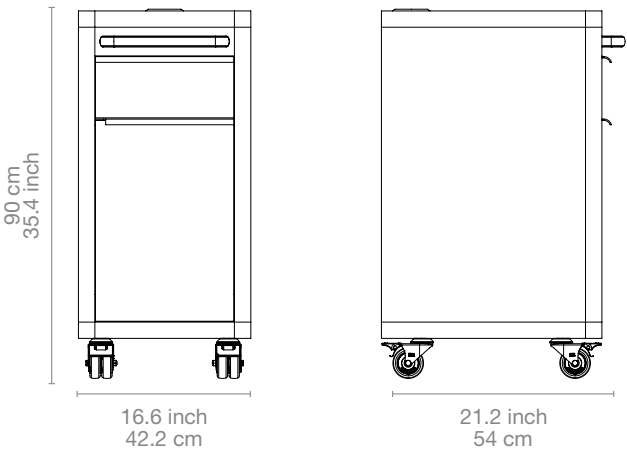



In numbers

Mechanics/electronics	
Number of axes and operation type	5 axes, simultaneous processing
Rotation angle	A-axis 360°, B-axis 130°
Spindle / power	High-frequency spindle / 860 W
Maximum spindle speed	100.000 rpm
Tools	Hilling and grinding tools with 3 mm tool shaft
Tool changer	10-fold
Tool length control	≤ 0.002 mm precision
Integrated PC	Windows based
Monitor	Integrated 10'1" touchscreen
Illumination	Dynamic LED illumination
Software	SmartControl™ integrated CNC software
Air pressure	3 bar/43.5 PSI, 50l/min/189.25 gpm/min
Cooling liquid	3 liter/11.36 gpm, integrated
Connecting requirements	
Weight	75 kg / 165.38 lbs
Width x depth x height	16.6 x 21.9 x 25.4 inch / 422 x 556 x 644 mm
Line voltage/frequency	100 V - 240 V/50/60 Hz

DESIGN | SCANNING | 3D PRINTING | MILLING | MATERIALS | POST-PROCESSING



Toronto, ON
Montreal, QC
Atlanta, GA

 dental.proto3000.com
 info@proto3000.com
 1-888-887-7686

**Digital Dental
Solutions**

CONTACT US

