

CORiTEC AM100

Focus on productivity and results



Fast and cost-effective Production

Fast production of dental restorations with a modern and cost-effective production technology



Perfect, individual production of CoCr units

Low manufacturing costs due to massive material savings in additive manufacturing;
Low production times per tooth unit;
up to 250 dental units per processing cycle



Possibility of the most complex dental constructions

E.g. highly complex frameworks like superstructures, model casting, primary / secondary parts, crowns & bridges



All-in-One Module

Additive build-up of e.g. implant-supported restorations with direct interface via the hybrid iCAM AM system for re-milling using CORiTEC milling systems in the hybrid process



i-PROMELT — Optimally matched for the CORiTEC AM100 CoCr dental alloy powder for manufacturing dental prostheses using the laser melting process

Excellent processing/flow properties and high surface quality. Main particle size distribution in the range of 10 – 30 µm. Type 5 alloy according to DIN EN ISO22674. CTE value 14.5 (20 – 500°C), perfect basis for a variety of veneering ceramics. For product information, please visit www.i-prodens.com



The latest technology
suitable for **any production center**



Holistic production solution

An optimally coordinated system from a single source and an integrated workflow



Co-thinking-philosophy

Assisting the user from the beginning with support, service and validated powder along with optimal parameters



Take the first step to the dental printing workflow

Perfect price/performance ratio as a complete System enables a fast amortization


Technical data

Printing process	LPBF (Laser-Powder-Bed-Fusion)
Laser power	200 W (Fiber)
Production capacity / day	up to 500 dental units
Building volume	up to 250 dental units
Building plate	150 mm x 150 mm
Layer height	20 – 80 microns
Materials	CoCr
Focus diameter	45 µm
Inert gas	Nitrogen
Power supply	230 V / 50 – 60 Hz
Dimensions (W x H x D)	1.1 x 1.9 x 0.79 m
Weight	approx. 990 lbs

CORiTEC AMpure

The unpacking station incl. sieve unit for powder preparation


Unpacking and sieving process

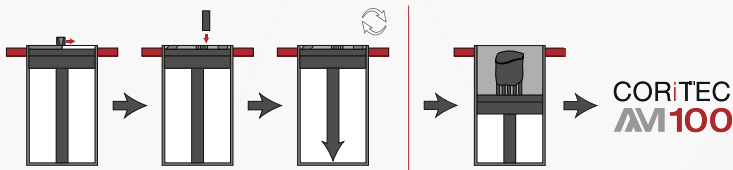


New powder is unpacked in the closed unpacking chamber without direct powder contact. Components can also be depowdered without direct powder contact. Processed powder is prepared by the integrated ultrasonic sieve unit and is collected in supply cartridge. This sieved and recycled powder in the cartridge can then be used directly for the next print job.



The Hybrid Process



- Post-processing milling technique of fabricated restorations in the LPBF process directly via the CORiTEC 350i / 650i machines



- High precision and perfect surfaces through advanced milling operations combined with the cost-effective LPBF manufacturing process



In combination with the 350i and 650i series of CORiTEC milling systems, new standards in hybrid technology for high-quality dental restorations are set by the re-milling of LPBF units. Coordinated hardware and software interfaces as well as automated measuring functions via the CAM and slicing software guarantee precise and easy handling. The special process was developed, for example, in order to build up highly complex bar constructions in advance at low cost using an additive process and then to remachine the interfaces with the CORiTEC milling machines to achieve the absolute perfect fit and surface quality.